



HYDRANTS

MILD CLIMATE ANTI-SIPHON SILLCOCK

FUNCTION: For installation in interior and exterior wall locations of buildings that are not subject to freezing. Vacuum breaker prevents contamination of potable water supply and conforms to the requirements of ASSE Standard 1011.

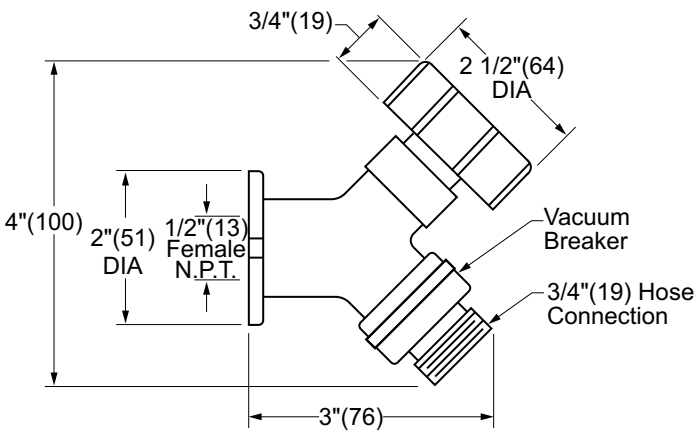


Fig. M-36721/2"(13) Inlet

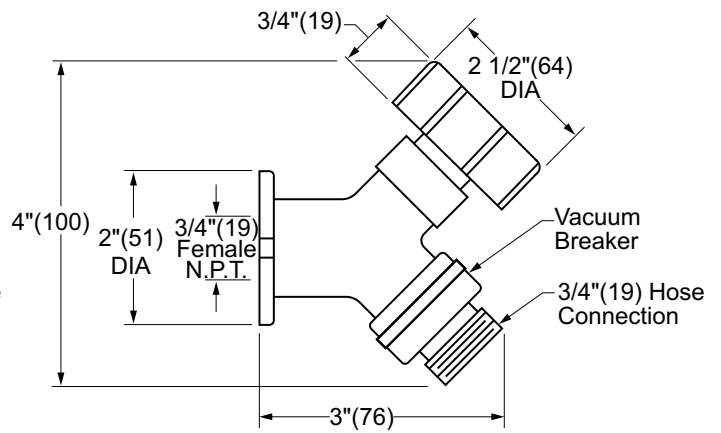


Fig. M-36733/4"(19) Inlet

NOTES:

1. The AB1953, California Lead Law, and NSF/ANSI Standard 61-2008 - Drinking Water Components are not applicable to hydrants as they do not convey/dispense water for human consumption through drinking or cooking.
2. Dimensions shown in parentheses are in millimeters.
3. **FOR IRRIGATION PURPOSES ONLY.**

REGULARLY FURNISHED:

Hose Valve has a Rough Finish Brass Body Removable Wheel Handle, "T" Handle Key, NPT Female Threaded Inlet Size Indicated by Figure Number Selected and ASSE 1011 Vacuum Breaker with 3/4"(19) Hose Connection.

OPTIONAL MATERIALS:

Rough Chrome Plated -CR

Please visit www.murdockmfg.com for most current specifications.



Member of U.S. Green Building Council



Recyclable Product



MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
 Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of MORRIS GROUP INTERNATIONAL