



RESTROOM FIXTURES

1013

MURDOCK-SUPER SECUR RESTROOM FIXTURE




MODEL # 1013

LAVATORY WITH DECK-MOUNTED VALVE

Complies with the following standard:




ITEM	DESCRIPTION	QTY
1	OPTIONAL LAVATORY VALVE	1
2	GT GRID STRAINER & TAILPIECE	1
3	1-1/2" X 1-1/4" TUBULAR P-TRAP	1
4	2" HOLE FOR WASTE OUTLET	1
5	MOUNTING BRACKET	1

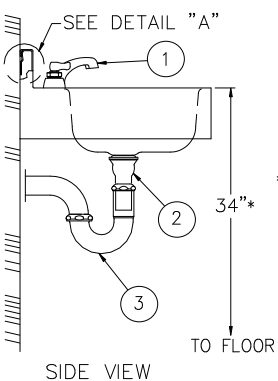

*NOTE:
34" RECOMMENDED MOUNTING HEIGHT ALLOWS 30" BELOW APRON.



Note: Fixture may show some available options

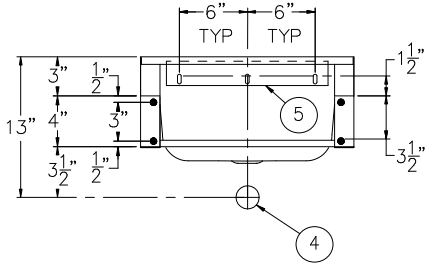

ROUGH-IN-DIMENSIONS

TECHNICAL DATA:

Fixture is designed to be installed on a finished wall and serviced from the front side. Fixture is fabricated from 16 gage, type 304 stainless steel and is seamless welded construction. Exterior has a satin finish.

Rectangular lavatory bowl is 14" x 12" x 6" deep. Lavatory deck has an integral self-draining soap dish.

Lavatory valves conform to lead free requirements of NSF61, Section 9, 1997 and CHSC 116875.

Regularly furnished items include wall mounting bracket, grid strainer with tailpiece and 1-1/4" x 1-1/2" tubular P-trap. Mounting screws are supplied by installer. Insulation may be required (supplied by installer) for drain lines on lavatories with hot and cold valves.

MODEL NUMBER:

- 1013-9 Lavatory less Valve (3-hole)
- 1013-H1-9 Lavatory less Valve (1-hole)
- 1013-CSSA Lavatory with Hot and Cold Valve
- 1013-SO2 Lavatory with Cold Only Sensor Valve
- 1013-ST5 Lavatory with Cold Only Valve

PRODUCT OPTIONS:

- EG Enviro-Glaze (for color selection see flier)

See Options on Sheet LAV-OPT

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____ Quantity _____

Company _____

Contact _____ Title _____

Signature (Approval for Manufacturing) _____ Date _____

All dimensions are nominal and subject to change without notice. Murdock-Super Secur assumes no responsibility for use of void or suspended data.
© Copyright Murdock-Super Secur, Acorn Family of Companies
Please visit www.murdock-supersecur.com for most current specifications.