



OUTDOOR SHOWERS

Shower Series

MODEL M-PCS24
TWO STATION POOL
AND BEACH SHOWER

STANDARD FEATURES

- Pushbuttons requiring less than 5 pounds for activation
- Adjustable timing, from 5 to 60 seconds
- Chrome plated brass shower heads with 2.5 gpm flow controls and adjustable spray pattern
- Vandal resistant fasteners
- Shut off valve for easy servicing
- Heavy duty, 14 gage, 304 stainless steel construction with corrosion and scratch resistant satin finish


SUGGESTED SPECIFICATIONS

Column shower shall be Murdock model M-PCS24, dual station shower. Unit is to be pre-piped and hydrostatically tested.

Valves shall have internally mounted metering valves, pushbutton operated and requiring less than 5 pounds of force to activate. Timing shall be adjusted from 5 to 60 seconds.

Shower heads shall be chrome plated brass with 2.5 gpm flow restrictors and include an adjustable spray pattern from a coarse stream to a fine mist.

Unit shall be constructed of heavy duty 14 gage type 304 stainless steel polished to a satin finish with vandal resistant fasteners and shall include a 1/4" thick stainless steel bottom plate, providing secure mounting for shower.

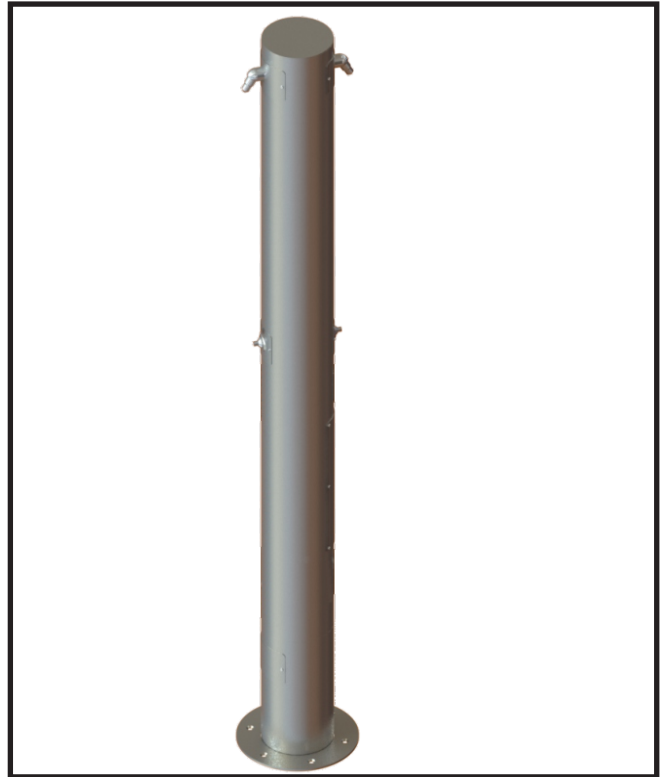

Standard Model: M-PCS24

MODEL:
(Must Specify)

- M-PCS24 Satin Stainless Finish (Shown)
 - M-PCS25 Green Powder-Coated
 - M-PCS26 Red Powder-Coated
 - M-PCS27 Blue Powder-Coated
- Custom color finishes available upon request

OPTIONS

(additional costs may be incurred)

- FRU2 Underground freeze-resistant valve for two pushbuttons ¹
- FRU3 Underground freeze-resistant valve for three pushbuttons ¹
- FRU4 Underground freeze-resistant valve for four pushbuttons ¹
- FS Foot shower at one station ¹
- FS2 Foot shower at two stations ¹
- GB Grab bar - Two vertical grab bars and second lower shower head at 48" ¹
- IAP In-ground anchor plate (replaces standard anchor plate) ¹
- LOGO Customer specified logo ¹

Options Notes:

¹ See separate option sheet.

Please visit www.murdockmfg.com for most current specifications.



Member of
U.S. Green
Building
Council



Recyclable
Product

Complies with the
following standards:



MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of
MORRIS GROUP
INTERNATIONAL




OUTDOOR SHOWERS

All dimensions are subject to manufactures tolerance of plus or minus 1/8" nominal and subject to change without notice. Murdock Mfg. assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.Murdockmfg.com for most current specifications.

Shower Series

MODEL M-PCS24 TWO STATION POOL AND BEACH SHOWER

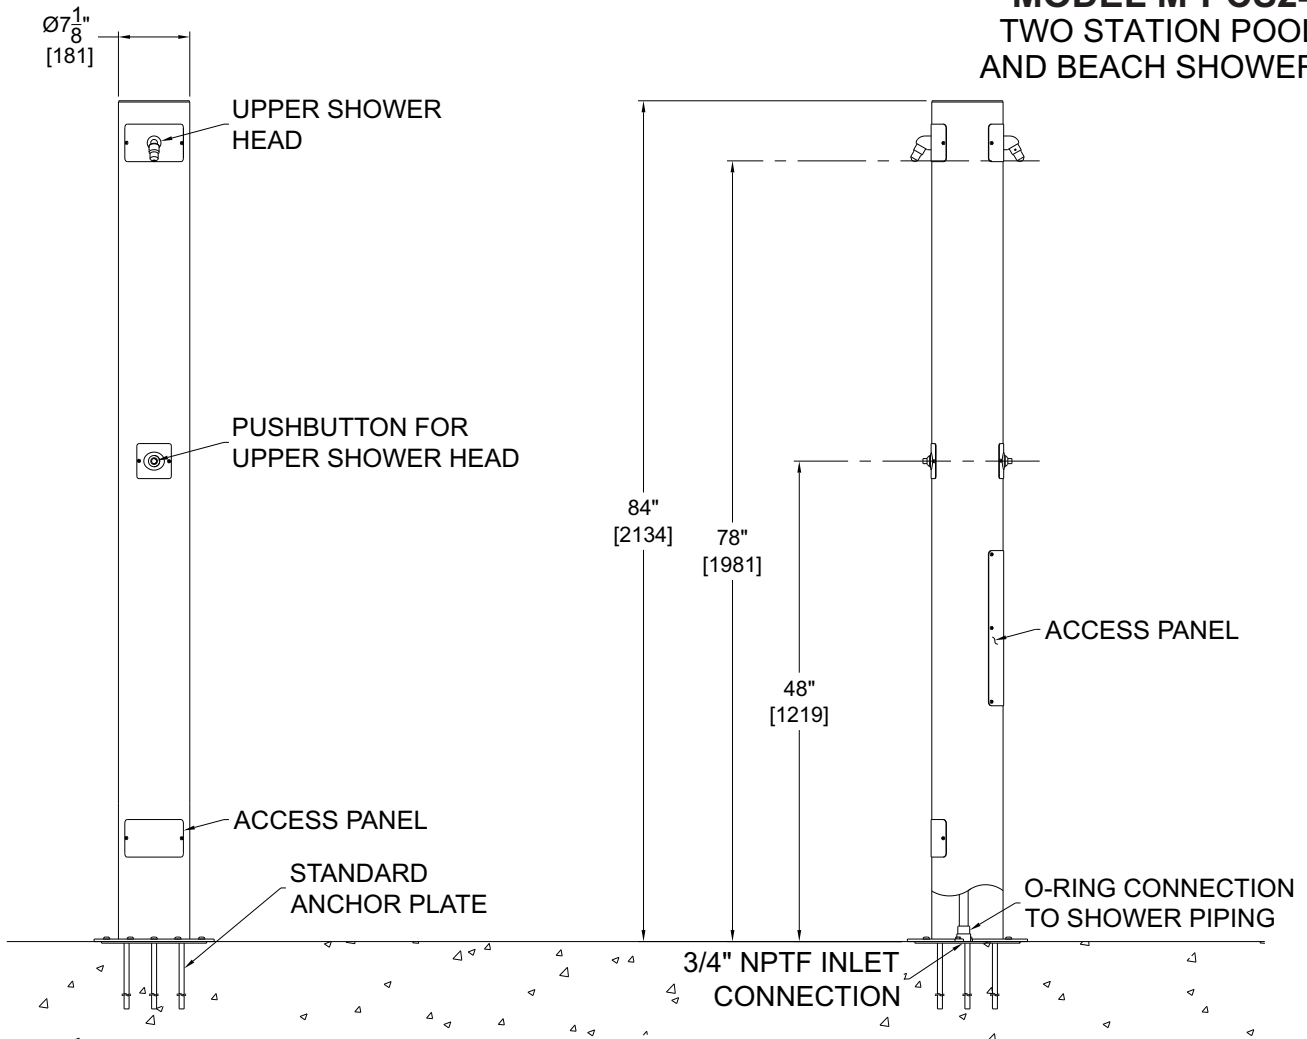

GENERAL NOTES:

- 1. ALL DIMENSIONS ARE IN INCHES [MM].

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING	Model Number & Options _____	Quantity _____	All dimensions are subject to manufactures tolerance of plus or minus 1/8" nominal and subject to change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.murdockmfg.com for most current specifications.
	Company _____		
	Contact _____	Title _____	
	Signature (Approval for Manufacturing) _____	Date _____	