



RESTROOM ACCESSORIES

1150-SO1

MURDOCK-SUPER SECUR RESTROOM ACCESSORIES


MODEL #
1150-SO1

CONCEALED
TOILET
FLUSH
VALVE

ITEM	DESCRIPTION	QTY
1	FLUSH VALVE	1
2	INFRARED SENSOR	1
3	THRU WALL SUPPLY ASSY	1
4	TAILPIECE WITH SLIP JOINT NUTS	1



Note: Fixture may show some available options

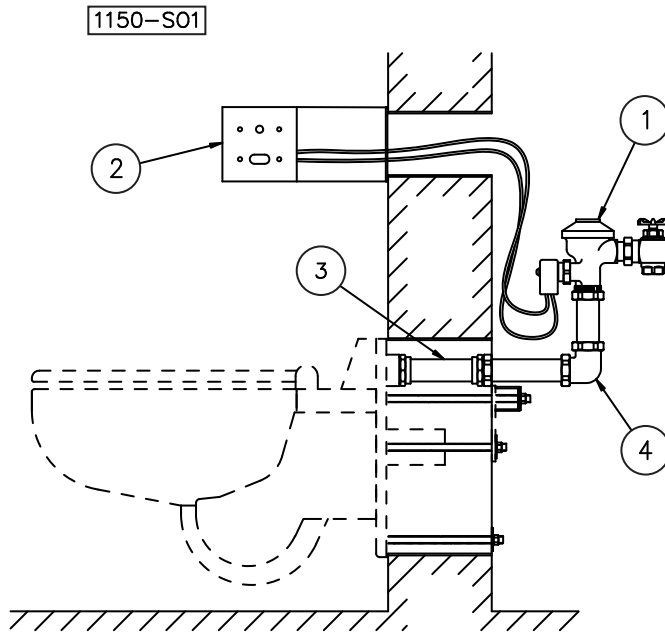

NOTE:
CUT PART #3 TO FIT &
SOLDER TOGETHER IN FIELD.

TECHNICAL DATA:

1150-SO1 concealed toilet flush valve has a code-approved vacuum breaker. Construction is bronze. Flush valve has a wall-mounted infrared sensor for operation. Sensor is powered by an optional transformer in the plumbing chase. Sensor operation meets ADA requirements. Check stop has a 1" inlet. Tailpiece is 1-1/2" diameter.

Toilet flush valve requires a 35 PSI flow pressure and typically requires a 1-1/4" minimum water supply line to restroom.

-ULF flush valve has a 1.6 gallon flush in place of the standard 3.5 gallon flush.

MODEL NUMBER:

- 1150-SO1 Toilet Flush Valve with Sensor Operation

PRODUCT OPTIONS:

- ULF 1.6 Gallon Flush
- Transformer

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

All dimensions are nominal and subject to manufacturer's change without notice. Murdock-Super Secur assumes no responsibility for use of void or suspended data. © Copyright 2006, Murdock-Super Secur, a division of Acorn Engineering Company. Please visit www.murdock-supersecur.com for most current specifications.

Model Numbers & Options _____ Quantity _____

Company _____ Date _____

Contact _____ Title _____

Approval for Manufacturing/Signature _____